


PM-R2 DRUMINDUCTORS

PM-R Inductors are typically used in EMI filters and switch mode power supplies. They are optimal in projects that need a low cost solution.

- ◆ Small size to fit in tight spaces.
- ◆ High current, high energy capable.
- ◆ Low resistance for low temperature rise.

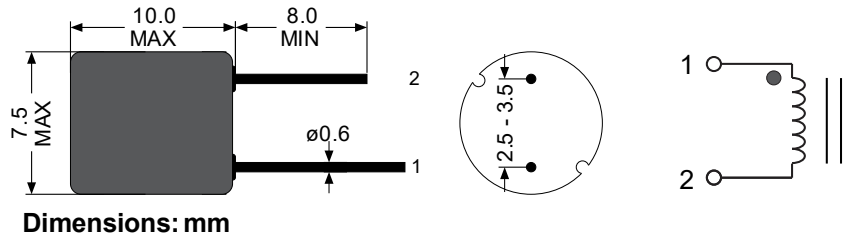

ELECTRICAL SPECIFICATIONS AT 25°C

PART NUMBER	L ±10% (μH)	Ipk (A)	MAX DCR (Ω)	SRF (MHz)
PM-R20101	100	1.55	0.3	6.0
PM-R20221	220	1.05	0.5	4.0
PM-R20331	330	0.84	0.9	3.5
PM-R20471	470	0.70	1.2	2.5
PM-R20681	680	0.58	1.8	2.0
PM-R20821	820	0.54	2.0	2.0
PM-R20102	1000	0.48	2.5	1.5
PM-R20222	2200	0.32	4.7	1.0
PM-R20332	3300	0.26	7.6	1.0
PM-R20472	4700	0.23	11.0	0.8
PM-R20682	6800	0.18	15.0	0.5
PM-R20822	8200	0.17	19.0	0.5
PM-R20103	10000	0.15	21.5	0.5

NOTES:

- 1) Ipk is the instantaneous current that typically drops the inductance by 30%.
- 2) SRF values are typical.
- 3) Operating temperature range -40°C to (see "Y" in note #4).
- 4) Part number PM-RXYZZZ
 - X: Family
 - Y: 0=sleeving (+125°C); 9=without sleeving (+155°C)
 - Z: Inductance
- 5) Available in higher temperature ratings.

