

POWER TRANSFORMERS ENCAPSULATED

RoHS

- * 115V Single -OR- 230V Primaries, 50/60Hz
- * Low Capacitive Coupling Minimizes Line Noise

- * 2.3 to 2.8VA
- * 1500Vrms Isolation (Hi-Pot)


ELECTRICAL SPECIFICATIONS AT 25°C

PART NUMBER	Power VA	Primary Vin	Secondary	
			V1	I1 (mA)
PTE-0001	2.3	115	4.5	511
PTE-0002	2.3	115	6.0	383
PTE-0003	2.3	115	7.5	307
PTE-0004	2.3	115	9.0	256
PTE-0005	2.3	115	12.0	192
PTE-0006	2.3	115	15.0	153
PTE-0007	2.3	115	18.0	128
PTE-0008	2.3	115	24.0	96
PTE-0021	2.3	230	4.5	511
PTE-0022	2.3	230	6.0	383
PTE-0023	2.3	230	7.5	307
PTE-0024	2.3	230	9.0	256
PTE-0025	2.3	230	12.0	192
PTE-0026	2.3	230	15.0	153
PTE-0027	2.3	230	18.0	128
PTE-0028	2.3	230	24.0	96
PTE-0041	2.8	115	4.5	622
PTE-0042	2.8	115	6.0	467
PTE-0043	2.8	115	7.5	373
PTE-0044	2.8	115	9.0	311
PTE-0045	2.8	115	12.0	233
PTE-0046	2.8	115	15.0	187
PTE-0047	2.8	115	18.0	156
PTE-0048	2.8	115	24.0	117
PTE-0061	2.8	230	4.5	622
PTE-0062	2.8	230	6.0	467
PTE-0063	2.8	230	7.5	373
PTE-0064	2.8	230	9.0	311
PTE-0065	2.8	230	12.0	233
PTE-0066	2.8	230	15.0	187
PTE-0067	2.8	230	18.0	156
PTE-0068	2.8	230	24.0	117


PACKAGE

MARKING ON TOP

P PTE-XXXX
M YYWW

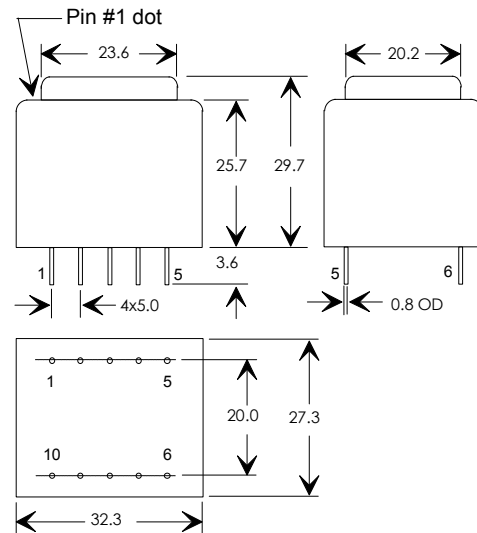

SCHEMATIC

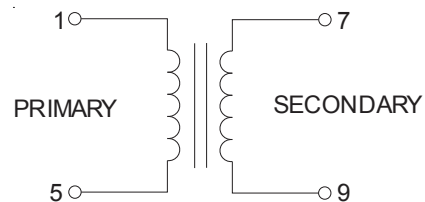

POWER TRANSFORMERS ENCAPSULATED

RoHS

- * 115V Single -OR- 230V Primaries, 50/60Hz
- * Low Capacitive Coupling Minimizes Line Noise

- * 2.3 to 2.8VA
- * 1500Vrms Isolation (Hi-Pot)
- * Secondary may be series or parallel


ELECTRICAL SPECIFICATIONS AT 25°C

PART NUMBER	Power VA	Primary Vin	Secondary			
			V1	V2	I1 (mA)	I2 (mA)
PTE-0081	2.3	115	4.5	4.5	256	256
PTE-0082	2.3	115	6.0	6.0	192	192
PTE-0083	2.3	115	7.5	7.5	153	153
PTE-0084	2.3	115	9.0	9.0	128	128
PTE-0085	2.3	115	12.0	12.0	96	96
PTE-0086	2.3	115	15.0	15.0	77	77
PTE-0087	2.3	115	18.0	18.0	64	64
PTE-0088	2.3	115	24.0	24.0	48	48
PTE-0094	2.3	230	4.5	4.5	256	256
PTE-0095	2.3	230	6.0	6.0	192	192
PTE-0096	2.3	230	7.5	7.5	153	153
PTE-0097	2.3	230	9.0	9.0	128	128
PTE-0098	2.3	230	12.0	12.0	96	96
PTE-0099	2.3	230	15.0	15.0	77	77
PTE-0100	2.3	230	18.0	18.0	64	64
PTE-0101	2.3	230	24.0	24.0	48	48
PTE-0114	2.8	115	4.5	4.5	311	311
PTE-0115	2.8	115	6.0	6.0	233	233
PTE-0116	2.8	115	7.5	7.5	187	187
PTE-0117	2.8	115	9.0	9.0	156	156
PTE-0118	2.8	115	12.0	12.0	117	117
PTE-0119	2.8	115	15.0	15.0	93	93
PTE-0120	2.8	115	18.0	18.0	78	78
PTE-0121	2.8	115	24.0	24.0	58	58
PTE-0134	2.8	230	4.5	4.5	311	311
PTE-0135	2.8	230	6.0	6.0	233	233
PTE-0136	2.8	230	7.5	7.5	187	187
PTE-0137	2.8	230	9.0	9.0	156	156
PTE-0138	2.8	230	12.0	12.0	117	117
PTE-0139	2.8	230	15.0	15.0	93	93
PTE-0140	2.8	230	18.0	18.0	78	78
PTE-0141	2.8	230	24.0	24.0	58	58


PACKAGE

MARKING ON TOP

P PTE-XXXX
M YYWW

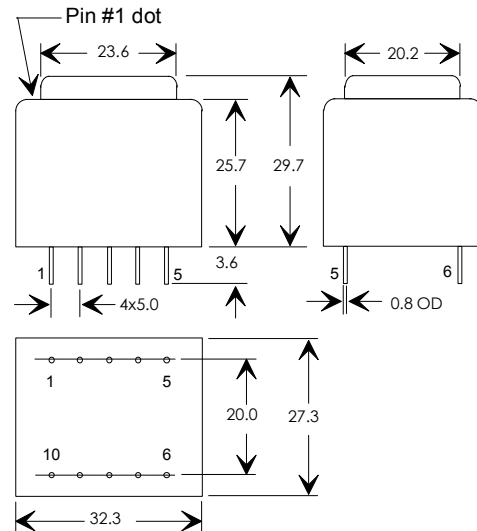

SCHEMATIC

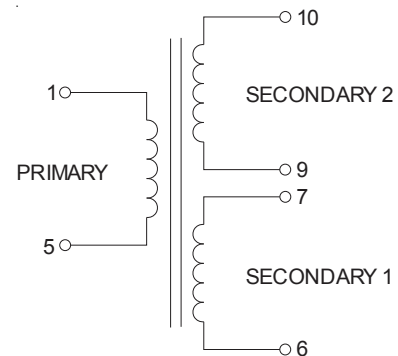

POWER TRANSFORMERS ENCAPSULATED

RoHS


- * 115V Single -OR- 230V Primaries, 50/60Hz
- * Low Capacitive Coupling Minimizes Line Noise

- * 2.3 to 2.8VA
- * 1500Vrms Isolation (Hi-Pot)

ELECTRICAL SPECIFICATIONS AT 25°C

PART NUMBER	Power VA	Primary Vin	Secondary			
			V1	V2	I1 (mA)	I2 (mA)
PTE-0154	2.3	115	4.5	4.5	256	256
PTE-0155	2.3	115	6.0	6.0	192	192
PTE-0156	2.3	115	7.5	7.5	153	153
PTE-0157	2.3	115	9.0	9.0	128	128
PTE-0158	2.3	115	12.0	12.0	96	96
PTE-0159	2.3	115	15.0	15.0	77	77
PTE-0160	2.3	115	18.0	18.0	64	64
PTE-0161	2.3	115	24.0	24.0	48	48
PTE-0174	2.3	230	4.5	4.5	256	256
PTE-0175	2.3	230	6.0	6.0	192	192
PTE-0176	2.3	230	7.5	7.5	153	153
PTE-0177	2.3	230	9.0	9.0	128	128
PTE-0178	2.3	230	12.0	12.0	96	96
PTE-0179	2.3	230	15.0	15.0	77	77
PTE-0180	2.3	230	18.0	18.0	64	64
PTE-0181	2.3	230	24.0	24.0	48	48
PTE-0194	2.8	115	4.5	4.5	311	311
PTE-0195	2.8	115	6.0	6.0	233	233
PTE-0196	2.8	115	7.5	7.5	187	187
PTE-0197	2.8	115	9.0	9.0	156	156
PTE-0198	2.8	115	12.0	12.0	117	117
PTE-0199	2.8	115	15.0	15.0	93	93
PTE-0200	2.8	115	18.0	18.0	78	78
PTE-0201	2.8	115	24.0	24.0	58	58
PTE-0214	2.8	230	4.5	4.5	311	311
PTE-0215	2.8	230	6.0	6.0	233	233
PTE-0216	2.8	230	7.5	7.5	187	187
PTE-0217	2.8	230	9.0	9.0	156	156
PTE-0218	2.8	230	12.0	12.0	117	117
PTE-0219	2.8	230	15.0	15.0	93	93
PTE-0220	2.8	230	18.0	18.0	78	78
PTE-0221	2.8	230	24.0	24.0	58	58

PACKAGE

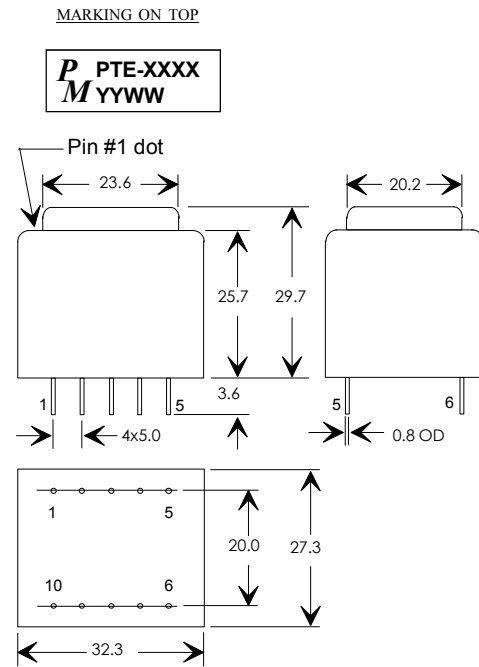

SCHEMATIC

